




## RX79 型精密采样电阻器 1-6W (空心)

RX79 Precision Sampling Resistors 1-6W

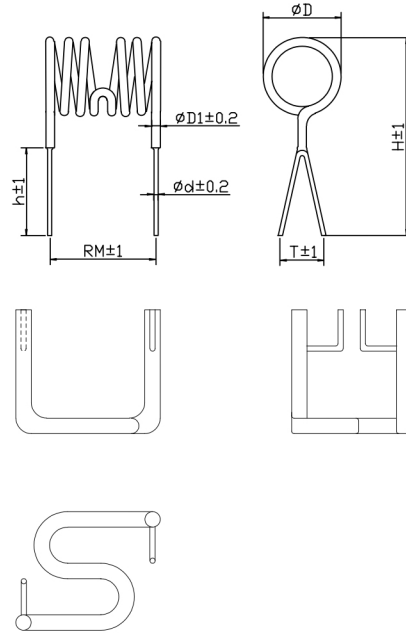

### 产品特点 Features

- 高精度 - 低温度系数  
Close tolerances-Low T.C.R
- 低阻值、低电感  
Low resistance and low inductance
- 易于焊接  
Easy to weld

### 应用范围 Applications

- 仪器、仪表  
Meters and instruments
- 自动控制装置  
Auto control devices
- 用于电源等回路的限流、均流或取样检测  
Applied for current limited current balance or sampling for testing
- 应用于电池检测设备  
Applied in battery testing equipment

### 主要性能技术指标 Main specification

| 型号<br>Type | 功率<br>Power<br>(W) | 阻值范围<br>Resistance<br>Range | 阻值精度<br>Tolerance Range | 外形尺寸 Dimensions(mm) |    |    |      |    |     |      |
|------------|--------------------|-----------------------------|-------------------------|---------------------|----|----|------|----|-----|------|
|            |                    |                             |                         | L                   | RM | H  | D    | h  | d   | T    |
| RX79       | 1                  | 1-100mR                     | ± 0.5%(D)<br>± 1%(F)    | 13                  | 15 | 32 | 12.5 | 15 | 1.0 | 12   |
|            | 2                  |                             |                         | 13                  | 15 | 32 | 12.5 | 15 | 1.5 | 12   |
|            | 6                  |                             |                         | 28                  | 25 | 55 | 17   | 20 | 2.0 | 12.5 |

### 订货示例 How to order

| 产品型号<br>Type | 功率<br>Power | 标称阻值<br>Nominal value | 精度<br>Tolerance |
|--------------|-------------|-----------------------|-----------------|
| RX79         | 2W          | 10mR                  | ± 5%            |